

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/036379 A2**

(51) International Patent Classification<sup>7</sup>: **G06F**  
(21) International Application Number:  
PCT/US2003/033009  
(22) International Filing Date: 17 October 2003 (17.10.2003)  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data:  
60/419,256 17 October 2002 (17.10.2002) US  
(71) Applicant (for all designated States except US): **THE  
GENERAL HOSPITAL CORPORATION** [US/US]; 55  
Fruit Street, Boston, MA 02114 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and  
(75) Inventors/Applicants (for US only): **BONMASSAR, Giorgio** [IT/US]; 16 Taft Avenue, Lexington, MA 02421 (US). **BELLIVEAU, John, W.** [US/US]; 85 East India Row 24C, Boston, MA 02119 (US).  
(74) Agent: **ABELEV, Gary**; Baker Botts L.L.P., 30 Rockefeller Plaza, New York, NY 10112-4498 (US).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ARRANGEMENT AND METHOD FOR DETECTING ABNORMALITIES AND INCONSISTENCIES IN A BODY

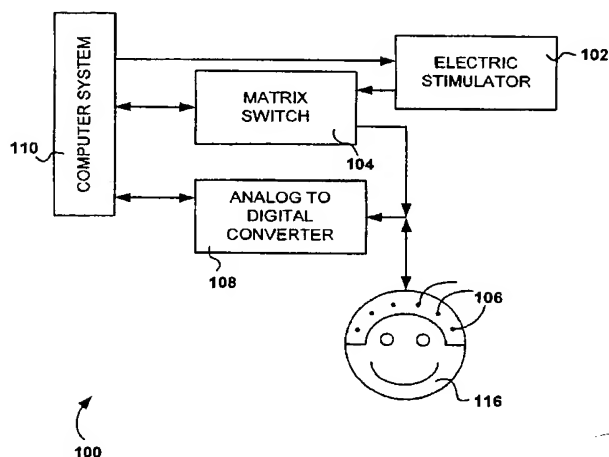

(57) Abstract: A system for detecting abnormalities or inconsistencies and a method to utilize the same are provided. In particular, a computer system may be adapted to detect the abnormality or inconsistency within at least a portion of a subject by generating internal impedance data which indicates that an impedance change within the portion of the subject has occurred. For example, the impedance change may be associated with a change in at least one characteristic of a blood vessel within the subject (such as a change in a fluid flow rate within at least a portion of the subject), a change in a fluid volume within at least a portion of the subject, etc. The impedance change also may be associated with the presence of a foreign object within the portion of the subject. In an exemplary embodiment, it is possible to detect the abnormality or inconsistency within the subject by generating a continuous, real time internal impedance map indicating the impedance change within the subject. Alternatively, the abnormality or inconsistency may be detected within the subject by generating a plurality of static internal impedance maps which indicate that the impedance change within the subject has occurred.

WO 2004/036379 A2

# ARRANGEMENT AND METHOD FOR DETECTING ABNORMALITIES AND INCONSISTENCIES IN A BODY

### CROSS-REFERENCE TO RELATED APPLICATION

The present application claims priority from U.S. Provisional Patent Application No. 60/419,256, which is entitled “Arrangement and Method for Detecting Abnormalities and Inconsistencies in a Body,” and was filed on October 17, 2002, the disclosure of which is incorporated herein by reference in its entirety.

## FIELD OF THE INVENTION

The present invention relates generally to an arrangement and method for detecting abnormalities and inconsistencies within a subject. In particular, the present invention is directed to an arrangement and method in which a computer system detects an abnormality or inconsistency within the subject by generating internal impedance data over a predetermined range of frequencies to indicate an impedance change within the subject.

## BACKGROUND OF THE INVENTION

Conventional electroencephalography (EEG) systems have been employed to record brain waves in a patient by measuring intrinsic voltages or currents produced by the brain of the patient. Specifically, conventional EEG systems detect and amplify brain waves, and convert the brain waves into digital data to be compared with data associated with normal brain waves. These systems may be employed to detect possible spinal cord injuries, stroke, epilepsy and a variety of brain dysfunctions related to a psychology of a patient ranging from substance abuse to psychosis. For example, certain conventional EEG systems include a plurality of electrodes which can be positioned on the scalp of a patient. The electrodes are coupled to a switching system, which in turn is coupled to a preamplifier that is connected to an amplifier. The amplifier is connected to a sixteen (16) bit analog to digital (A/D) converter, and the A/D converter is connected to a display. The A/D

converter samples the EEG waves, and converts the EEG waves into the digital data to be shown on the display. However, such conventional system only may be adapted to obtain EEG recordings.

Conventional electrical impedance tomography (EIT) systems have  
5 been employed to produce electrical impedance images in medical applications. These EIT systems measure current or voltage distributions resulting from the currents being applied to a portion of the body of the patient, and generate an image of such portion of the body based on the measured current or voltage distributions. These conventional systems have been employed, e.g., to display changes in the  
10 thorax during breathing, the stomach during a gastric emptying, the heart during intraventricular hemorrhage, and the brain due to a physiological cerebral activity, and to monitor the progression of various lung diseases. For example, the conventional EIT system can be adapted to image changes in the brain due to a physiological cerebral activity may include a current generator coupled to a switching  
15 arrangement, such as a computer controlled multiplexor. A plurality of electrodes are positioned in contact with the patient's scalp, and are coupled to the switching arrangement. An amplifier is coupled to the electrodes, a sixteen (16) bit A/D converter is connected to the amplifier, and a computer is connected to the A/D converter.

20 In operation, the current generator applies current to the electrodes. For example, the current may be applied sequentially to the electrode pairs, or simultaneously to multiple pairs of electrodes, which is known as a parallel data collection. Moreover, potential differences between the electrode pairs may be measured to obtain analog signals, and these analog signals may be amplified by the  
25 amplifier. Subsequently, the A/D converter converts the analog signals to digital signals, and forwards the digital signals to the computer. In this manner, the data may be processed by the reconstruction software to obtain image changes in the brain due to a physiological cerebral activity, and provide these images on a display. However, such conventional system may be adapted to only obtain EIT recordings that are e.g.,  
30 associated with the physiological cerebral activity, and may also be adapted to only monitor only certain organs. Moreover, such convention system only may obtain EIT recordings at a particular frequency.

### SUMMARY OF THE INVENTION

Therefore, a need has arisen to provide an arrangement and method for detecting abnormalities and inconsistencies which overcome the above-described and  
5 other shortcomings of the related art.

One of the advantages of the present invention is that the arrangement and method are provided which may detect the abnormality or inconsistency within a subject by generating internal impedance data that indicates the occurrence and/or particulars of an impedance change within the associate subject has for at least one  
10 characteristic of a blood vessel within the subject. For example, the impedance change associated with the change in the characteristic of the blood vessel may be a change of a fluid flow rate within at least a portion of the subject, a change of a fluid volume within at least a portion of the subject, etc. Another advantage of the system and method of the present invention is that the abnormality or inconsistency within a  
15 subject may be detected by generating internal impedance data that indicates an impedance change within the subject associated that is with the presence of a foreign object within at least a portion of the subject. Yet another advantage of the system and method of the present invention is that they allow simultaneous spectral electrical impedance tomography (SEIT) recordings and electroencephalography recordings,  
20 and/or simultaneous spectral electrical impedance tomography recordings and current density recordings to be obtained from the subject. Still another advantage of the present invention is that the system may be a portable system, so that it may be used by first responders to accidents, e.g., Emergency Medical Service (EMS) personnel, in order to assist the responders in obtaining data which is useful in making decisions  
25 concerning abnormalities or inconsistencies, such as injuries to the brain or torso involving foreign objects and/or internal bleeding.

According to an exemplary embodiment of the present invention, an arrangement and method utilize a computer system which may be adapted to detect abnormalities and inconsistencies within a subject, e.g., a human or an animal, by  
30 generating internal impedance data which indicates the occurrence and/or the particulars of an impedance change within at least a portion (e.g., a brain or a torso) of

the subject has occurred. For example, the impedance change may be associated with a change in at least one characteristic of a blood vessel within the subject, such as a change in a fluid (e.g., blood, flow rate within at least a portion of the subject) a change in a fluid volume within at least a portion of the subject, etc. The impedance change may also be associated with the presence of a foreign object (e.g., a metal foreign object) within at least a portion of the subject. Moreover, the internal impedance data may be obtained over a predetermined range of frequencies, such as between about 0.01 Hz and about 100 KHz. As examples the Cole-Cole or 4- Cole-Cole models may be used to determine tissue's impedance at a given frequency. In another exemplary embodiment of the present invention, the computer system may adapted to detect the abnormality or inconsistency within the subject by generating a continuous, real time internal impedance map which indicates the occurrence and/or the particulars of the impedance change within the portion of the subject. Alternatively, the computer system may be adapted to detect the abnormality or inconsistency within the subject by generating a plurality of static internal impedance maps which also may indicate the occurrence and/or the particulars of the impedance change within the subject.

In yet another exemplary embodiment of the present invention, it is possible to utilize an electrical stimulator, a switch coupled to the electrical stimulator, and a plurality of electrodes positioned on at least a portion of the subject and coupled to the switch. An analog to digital (A/D) converter can also be provided such that it is coupled to the switch and to each of the electrodes. Moreover, the computer system may be coupled to the switch and to the A/D converter. In operation, the electrical stimulator may apply current to at least a pair of the electrodes, and the A/D converter may measure voltage or current distributions resulting from the applied current. The applied current may be white noise or pink noise, depending on whether SEIT are being recorded, or whether SEIT and EEG signals are being simultaneously recorded. The A/D converter may also transmit the voltage or current distributions to the computer system so that the computer system may generate the internal impedance data based on the voltage or current distributions.

As examples, the computer system may use the Barber-Brown linear backprojection method, the Calderon approach, the moment method, the one-step Newton method, the least squares method, or constrain minimization methods in combination with an approximation model of the at least one portion of the subject (e.g. the head of the subject) to generate the internal impedance maps. Specifically, a map of the current flow through the head may be generated using the Barber-Brown backprojection method. Moreover, the computer system may include a database of approximated head models, and each approximation head model may be based on predetermined characteristics associated with an imaginary subject, such as a predetermined height, age, sex, etc., of the imaginary subject. Each approximation head model may indicate an expected current flow through the head of a subject whose characteristics are the same as or are similar to the predetermined characteristics. The computer system may select an appropriate approximated head model for the subject based on the characteristics of the subject, and the computer system then may alter the current flow map obtained using the Barber-Brown linear backprojection method based on the selected approximation head model to obtain the internal impedance maps.

According to still yet another exemplary embodiment of the present invention the A/D converter is, e.g., a twenty-four (24) bit, thirty-two (32) channel A/D converter, adapted to obtain simultaneous spectral electrical impedance tomography recordings and electroencephalography recordings from the subject. In a variation of this embodiment, the electrical stimulator and the computer system can be positioned externally from a magnetic resonance environment, such that the twenty-four (24) bit, thirty-two (32) channel A/D converter may be adapted to obtain simultaneous spectral electrical impedance tomography recordings and current density recordings from the subject.

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, the needs satisfied thereby, and the objects, features, and advantages thereof, reference now is

made to the following descriptions taken in connection with the accompanying drawings.

Fig. 1 is a schematic diagram of a first exemplary embodiment of an arrangement according to a first embodiment of the present invention for detecting abnormalities and inconsistencies in a subject.

Fig. 2 is a schematic diagram of a second exemplary embodiment of the arrangement of the present invention.

Fig. 3a is a flow diagram of a first exemplary embodiment of a method according to the present invention for detecting abnormalities and inconsistencies within the subject.

Fig. 3b is a flow diagram depicting a variation of the method of Fig. 3a.

Fig. 4a is a flow diagram of a second exemplary embodiment of the method according to the present invention.

Fig. 4b is a flow diagram depicting a first variation of the method of Fig. 4a.

Fig. 4c is a flow diagram depicting a second variation of the method of Fig. 4a.

## DETAILED DESCRIPTION

Exemplary embodiments of the present invention and their advantages may be understood by referring to Figs. 1-4b, like numerals being used for like corresponding parts in the various drawings.

Referring to Fig. 1, a first exemplary embodiment of an arrangement 100 according to the present invention for detecting abnormalities and inconsistencies in a subject is provided. The arrangement 100 may include a computer system 110 which can be adapted to detect an abnormality or inconsistency within at least a portion of a subject 116. Specifically, the computer system 110 may detect the abnormality or biological inconsistency by generating internal impedance data. For example, the computer system 110 may generate the internal impedance data over a predetermined range of frequencies, such as between about 0.01 Hz and about

100KHz. This internal data indicates the occurrence and/or the particulars of an impedance change within the subject 116 (associated with a change in at least one characteristic of a blood vessel within the subject). Alternatively, the internal impedance data may be associated with a presence of a foreign object within at least a  
5 portion of the subject 116. In an exemplary embodiment of the present invention, the impedance change associated with the change in the at least one characteristic of the blood vessel may be a variance in a fluid flow rate (e.g., a blood flow rate) within at least a portion of the subject 116. Alternatively, the impedance change can be a change in a fluid volume (e.g., a blood volume) within at least a portion of the subject.

10 In another exemplary embodiment of the present invention, the subject 116 may be a human being, an animal, etc., and the arrangement 100 may be adapted to detect the abnormality within a brain, a torso, etc. of the subject 116. Moreover, the abnormalities or biological inconsistencies may include an injury (such an injury associated with internal bleeding), the presence of a foreign object within the subject  
15 116, or any other internal or external abnormality or biological inconsistency resulting in a change in impedance within the subject 116. In these exemplary embodiments of the present invention, the impedance of blood is generally smaller than the impedance of a brain tissue (i.e., the conductivity of the blood is greater than the conductivity of the brain tissue), and is also less than the impedance of a tissue in the torso and other  
20 parts of the subject 116. When the blood volume or the blood flow in the brain, the torso, or any other part of the subject 116 increases (such as when a blood vessel is believed to be likely punctured or expanded), the impedance of at least a portion of the subject 116 decreases. For example, when the blood vessel is punctured, the blood flows from the punctured blood vessel, and the impedance of the tissue adjacent  
25 to the punctured blood vessel may decrease. Similarly, when the blood volume or the blood flow in the brain, the torso, or any other part of the subject 116 decreases (such as when a blood vessel is constricted), the impedance of at least a portion of the subject 116 may increase. Moreover, the impedance of a foreign object (e.g., a metal foreign object, such as a bullet, shrapnel, etc.) may be smaller than the impedance of  
30 the brain tissue, and can also be smaller than the impedance of the tissue in the torso or other parts of the subject 116. As such, when a foreign object is present in the brain, torso, or any other part of the subject 116, the impedance of at least a portion of



the subject 116 is decreased. As such, the arrangement 100 may be employed to determine whether the abnormality or biological inconsistency may exist (e.g., an injury to or the presence of a foreign object within the subject 116) by generating data associated with these changes in the impedance.

5 In particular, an exemplary embodiment of the arrangement 100 of the present invention may also include a plurality of electrodes 106 positioned on at least a portion of the subject 116, an electrical stimulator 102 (e.g., a function generator, such as a current function generator or a voltage function generator), a matrix switch 104 (e.g., a thirty-two (32) channel, analog matrix switch), and an A/D converter 108  
10 (e.g., a thirty-two (32) channel, twenty-four (24) bit A/D converter). The electrical stimulator 102 may be coupled to the matrix switch 104, and the matrix switch 104 may be coupled to the electrodes 106 and the computer system 110. Moreover, the electrodes 106 may be coupled to the A/D converter 108, which can be coupled to the computer system 110, and the computer system 110 may be coupled to the electrical  
15 stimulator 102. For example, the matrix switch 104 may be connected to the computer system 110 using an optical digital link, and the A/D converter 108 can be connected to the computer system 110 using an optical USB link. In this configuration, the computer system 110 may be used to control each component of the arrangement 100.

20 In operation, the electrical stimulator 102 can apply a current or a voltage to at least one pair (e.g., may simultaneously apply a current or a voltage to eight (8) pairs) of the electrodes 106, and the A/D converter 108 can continuously measure the voltage and/or current distributions at the electrodes 106 to which the current is not being applied. The applied current may be white noise or pink noise.  
25 For example, when the A/D converter 108 is obtaining SEIT recordings from the subject 112, the applied current may be white noise. Specifically, the frequency range of white noise may not overlap with the frequency range at which SEIT signals are detected (e.g., between about 50 Hz and about 100 KHz). Consequently, the white noise may not interfere with the recordation of SEIT signals. However, when the A/D  
30 converter 108 is simultaneously obtaining EEG recordings and SEIT recordings from the subject 112, the applied current may be pink noise. Specifically, the frequency range of pink noise may not overlap with the frequency range at which EEG signals

are detected (e.g., between about 0.01 Hz and about 50 Hz). Consequently, the pink noise may not may not interfere with the recordation of EEG signals. If the pink noise does interfere with the recordation of EEG signals, the unwanted pink noise readily may be filtered out (e.g., using an adaptive filter). Moreover, although the  
5 frequency range of pink noise may overlap with the frequency range at which SEIT signals are detected, the effect of such pink noise on the SEIT signals may be minimal.

In any of the above-described exemplary embodiments of the present invention, after electrical stimulator 102 applies the current or the voltage to the at  
10 least one pair of the electrodes 106, and the A/D converter 108 measures the voltage and/or current distributions at the electrodes 106 to which the current or voltage is not being applied, the matrix switch 104 switches the current to another one or more parts of the electrodes 106, and the A/D converter 108 obtains additional voltage or current distribution measurements from those electrodes. Thereafter, the A/D converter 108  
15 converts the analog voltages into digital data, and forwards the converted digital data to the computer system 110.

When the computer system 110 receives the digital data from the A/D converter 108, the computer system 110 can generate the internal impedance data which indicates the occurrence and/or the particulars of the impedance change within  
20 the subject 116. The impedance change is associated with a change in at least one characteristic of a blood vessel within the subject and/or with a presence of a foreign object within at least a portion of the subject 116. For example, the computer system 110 may generate a continuous, real time internal impedance map indicating the impedance change within the subject 116. Alternatively, the computer system 110  
25 may generate a plurality of static internal impedance maps indicating the impedance change within the subject 116. In addition, the computer system 110 may be adapted to compensate for impedance variations resulting from the attachment of the at least one electrode 106 to the subject 116 (e.g., variations resulting from the use of paste to attached the at least one electrode to the subject 116, cleansing of the portion of the  
30 subject 116 which the at least one electrode is attached, etc.). For example, the computer system 110 may compensate for the impedance variations resulting from the

attachment of the at least one electrode 106 to the subject 116 by using frequency spectrum normalizations.

In an exemplary embodiment of the present invention, the computer system 110 may generate the internal impedance maps by using a known linear approximation method, such as the Barber-Brown linear backprojection method, Calderon's method, a moment method, or a one-step Newton method. Each of these linear approximation methods readily will be understood by those of ordinary skill in the art. In another exemplary embodiment of the present invention, the computer system 110 may generate the internal impedance maps by using a known iterative method, such as by employing a layer-stripping algorithm.

Alternatively, the computer system 110 may use the Barber-Brown linear backprojection method in combination with an approximation model of the at least one portion of the subject 116 (e.g., the head of the subject 116) to generate the internal impedance maps. For example, in accordance with the Barber-Brown linear backprojection method, a pair of detectors (not shown) may be positioned on opposite sides of the head and may orbit the head. As the detectors orbit the head, two twin particles may be continuously transmitted to the detectors, and a map of the current flow through the head may be generated. However, as the frequency of the current flowing through the head decreases, the difficulty of obtaining data sufficient to generate an accurate map of the current flow through the head increases. Consequently, at least certain frequencies, using the Barber-Brown linear backprojection method by itself may not be sufficient to generate an accurate map of the current flow through the head. In this exemplary embodiment of the present invention, the approximation model of the head may be used in combination with the above-described current data obtained using the Barber-Brown linear backprojection method to generate the internal impedance maps. Specifically, the computer system 110 may include a database of approximated head models, and each approximation head model may be based on predetermined characteristics associated with an imaginary subject, such as a predetermined height, age, sex, etc., of the imaginary subject. Moreover, each approximation head model may indicate an expected current flow through the head of a subject 116 who's characteristics are the same as or are similar to the predetermined characteristics. The computer system 110 may select an

appropriate approximated head model for the subject 116 based on the characteristics of the subject 116, and the computer system 110 then may alter the current flow map obtained using the Barber-Brown linear backprojection method based on the selected approximation head model to obtain the internal impedance maps.

5                   In another variation of the present invention, the arrangement 100 may be a portable abnormality detection arrangement. As such, the arrangement 100 may be used by first responders to accidents (e.g., EMS personnel) in order to assist the responder in obtaining data that is useful in making decisions concerning abnormalities or biological inconsistencies, such as injuries to the brain or torso  
10                   involving foreign objects and/or internal bleeding. Further, in yet another variation of the arrangement 100, the A/D converter 108 can be a thirty-two (32) channel, twenty-four (24) bit A/D converter, and thus the bandwidth of the arrangement 100 may be sufficient to allow the computer system 110 to obtain simultaneous SEIT and EEG recordings. These simultaneous SEIT and EEG recordings allow the computer system  
15                   110 to gather information related to different types of medical problems, simultaneously. For example, the SEIT recordings may be used to detect the presence of the foreign object in the subject 116, and can detect an increase in the blood to the brain, torso, or any other body part due to trauma. In contrast, the EEG recordings may be used to detect strokes, epilepsy, spinal cord injuries, substance abuse, and any  
20                   other injury or occurrence which can affect the brain to emit the corresponding waves.

                  Fig. 2 shows a second exemplary embodiment of the arrangement 200 for detecting the abnormalities or biological inconsistencies for use within a magnetic resonance imaging (MRI) environment 114 according to the present invention. The features and advantages of the second embodiment of the arrangement 200 of the  
25                   present invention are substantially similar to the features and advantages of the second embodiment of the present invention, except as provided herein below. In the second exemplary embodiment of the arrangement 200 of the present invention, the electrical stimulator 102 and the computer system 110 may be positioned externally from the MRI environment 114, and the arrangement 200 may further include at least one filter  
30                   112 (e.g., at least one radio frequency filter) communicatively connected between the electrical stimulator 102 and the matrix switch 104. Moreover, the filter 112 may be

adapted to filter the current applied by the electrical stimulator 102 before the current is transmitted into the MRI environment 114.

In this exemplary embodiment of the present invention, the A/D converter 108 may be adapted to obtain simultaneous SEIT recordings and current density recordings from the subject 116. Specifically, imaging techniques such as a current density imaging ("CDI") technique can be utilized to generate electrical current density distributions in a volume of the subject 116 being examined using the MRI techniques. For example, when the electrical stimulator 102 applies the electrical current to the subject 116, the computer system 110 may receive MRI data and SEIT data from the A/D converter 108. Using known mathematical techniques, the computer system 110 can process the MRI data so as to convert the MRI data into current density distribution data, which may be used to determine a current flow or a current path within the subject 116. After the current flow within the subject 116 is determined, the location of particular portions of the subject 116 in which an impedance change or impedance spike occurs may be determined more precisely. Consequently, an internal impedance map, generated by the computer system 110 based on the SEIT data and the current density distribution data, may have a greater spatial resolution than an internal impedance map which is generated based on the SEIT data.

Referring to Fig. 3a, a flow diagram of a first exemplary embodiment of a method 300 which can be used by the arrangement 100 of Fig. 1 is depicted. In step 310, a plurality of electrodes 106 may be positioned on at least a portion of the subject 116. In step 320, a current can be applied to at least one pair of the electrodes 106 (or even to a single electrode). In step 330, voltage or current distributions resulting from the applied current may be measured. Then, in step 340, the internal impedance data is generated. A user of the arrangement 100 determines whether the internal impedance data indicates an impedance change within the subject 116 in step 350. This impedance change is associated with a change in the blood vessel characteristic and/or a presence of the foreign object within at least a portion of the subject 116. Referring to Fig. 3b, in a variation of the first exemplary embodiment of the method 300 according to the present invention, step 350 may be replaced by step 350'. In step 350', the user of the arrangement 100 determines whether the internal

impedance data indicates the impedance change within subject 116 that is associated with a change in fluid flow rate (e.g., a blood flow rate) and/or the change in fluid volume (e.g., a blood volume) within the subject 116. In either one of the variants of the method 300 illustrated in Figs. 3a and 3b, if the internal impedance data indicates such impedance change, in step 360, the user of the arrangement 100 detects an abnormality within the subject 116. If the internal impedance data does not indicate such an impedance change, in step 370, the user of the arrangement 100 detects the absence of an abnormality or biological inconsistency within the subject 116.

Referring to Fig. 4a, a flow diagram of a second embodiment of a method 400 according to the present invention which is used by the arrangement 200 of Fig. 2 is depicted. In step 410, the electrodes 106 may be positioned on at least a portion of the subject 116. In step 420, the current can be applied to at least a pair of the electrodes 106. Further, in step 430, the current may be filtered before the current is transmitted inside the MRI environment. In step 440, the voltage or current distributions resulting from the applied current may be measured. Referring to Fig. 4b which shows a first variation of the second exemplary embodiment of the method 400 according to the present invention, this method is substantially the same as that of Fig. 4a, except steps 440a and 440b can also be provided. In step 440a, MRI data may be acquired, and in step 440b, the MRI data may be converted into voltage or current distribution data. Moreover, in step 450, the internal impedance data is generated. For example, the internal impedance data can be based on the voltage or current distributions. In step 460, the user of the arrangement 200 determines whether the internal impedance data indicates the impedance change within the subject 116 associated with a change in a blood vessel characteristic, and/or a presence of the foreign object within at least a portion of the subject 116. Referring to Fig. 4c, in a second variation of the second exemplary embodiment of the method 300 of the present invention, step 460 may be replaced by step 460'. In step 460', the user of the arrangement 200 determines whether the internal impedance data indicates the impedance change within subject 116 associated with the change in fluid flow rate (e.g., the blood flow rate) and/or a change in fluid volume (e.g., the blood volume) within the subject 116. In either of the flow diagrams of Figs. 4a and 4b, if the internal impedance data indicates such impedance change, in step 470, the user of the

arrangement 200 detects an abnormality within the subject 116. If the internal impedance data does not indicate such impedance change, in step 480, the user of the arrangement 200 detects the absence of the abnormality or biological inconsistency within the subject 116.

- 5                   While the invention has been described in connection with preferred embodiments, it will be understood by those of ordinary skill in the art that other variations and modifications of the preferred embodiments described above may be made without departing from the scope of the invention. Other embodiments will be apparent to those of ordinary skill in the art from a consideration of the specification
- 10 or practice of the invention disclosed herein. It is intended that the specification and the described examples are considered as exemplary only, with the true scope and spirit of the invention indicated by the following claims.

What Is Claimed Is:

1. An arrangement, comprising:  
a computer system adapted to detect an abnormality or an inconsistency within a subject by generating internal impedance data, the internal  
5 impedance data indicating an impedance change within at least one portion of the subject, wherein the impedance change is associated with at least one of:  
a change in at least one characteristic of a blood vessel within the subject, and  
a presence of a foreign object within the at least one portion of  
10 the subject.
2. The arrangement of claim 1, further comprising:  
an electrical stimulator adapted to apply a current to at least one pair of electrodes that are positioned in a proximity of the at least one portion of the subject;  
and  
15 an analog to digital (A/D) converter adapted to measure voltage distributions resulting from the applied current, wherein the internal impedance data is generated based on the voltage distributions.
3. The arrangement of claim 1, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:  
20 a change in a fluid flow rate within the at least one portion of the subject, and  
a change in a fluid volume within the at least one portion of the subject.
4. The arrangement of claim 3, wherein the fluid includes blood.
- 25 5. The arrangement of claim 3, wherein the at least one portion of the foreign object comprises a metal material.
6. The arrangement of claim 1, wherein the computer system generates a continuous, real time internal impedance map to detect the abnormality or



inconsistency within the subject by generating, and wherein the impedance map indicates the impedance change within the subject.

7. The arrangement of claim 1, wherein the computer system generates a plurality of static internal impedance maps to detect the abnormality or inconsistency within the subject, and wherein the impedance maps indicate the impedance change within the subject.

8. The arrangement of claim 1, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.

9. The arrangement of claim 1, wherein the at least one portion of the subject is a portion of a brain of the subject.

10. The arrangement of claim 1, wherein the at least one portion of the subject is a portion of a torso of the subject.

11. The arrangement of claim 2, wherein the electrical stimulator is a function generator.

12. The arrangement of claim 2, wherein the A/D converter is a thirty-two channel, twenty-four bit A/D converter.

13. The arrangement of claim 12, wherein the computer system is adapted to obtain spectral electrical impedance tomography recordings and electroencephalography recordings, simultaneously.

14. An arrangement, comprising:  
an electrical stimulator adapted to apply a current to at least one pair of electrodes, the electrodes being positioned on at least one portion of a subject;  
an analog to digital (A/D) converter adapted to measure voltage distributions resulting from the applied current; and

a computer system adapted to detect an abnormality or an inconsistency within the at least one portion of the subject by generating internal impedance data, the internal impedance data indicating the impedance change within the subject wherein the impedance change is associated with at least one of:

- 5                   a change in at least one characteristic of a blood vessel within the subject, and  
                  a presence of a foreign object within the at least one portion of the subject.

15.     The arrangement of claim 14, wherein the impedance change  
10 associated with the change in the at least one characteristic of the blood vessel is at least one of:

- a change in a fluid flow rate within the at least one portion of the subject, and  
                  a change in a fluid volume within the at least one portion of the  
15 subject.

16.     The arrangement of claim 15, wherein the fluid includes blood.

17.     The arrangement of claim 15, wherein the at least one portion of the foreign object comprises a metal material.

18.     The arrangement of claim 14, wherein the computer system generates a  
20 continuous, real time internal impedance map to detect the abnormality or inconsistency within the subject by generating, and wherein the impedance map indicates the impedance change within the subject.

19.     The arrangement of claim 14, wherein the computer system generates a plurality of static internal impedance maps to detect the abnormality or inconsistency  
25 within the subject, and wherein the impedance maps indicate the impedance change within the subject.

20.     The arrangement of claim 14, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the

inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.

21. The arrangement of claim 14, wherein the at least one portion of the subject is a portion of a brain of the subject.

5 22. The arrangement of claim 14, wherein the at least one portion of the subject is a portion of a torso of the subject.

23. The arrangement of claim 14, wherein the electrical stimulator is a function generator.

24. The arrangement of claim 14, wherein the A/D converter is a thirty-  
10 two channel, twenty-four bit A/D converter.

25. The arrangement of claim 24, wherein the computer system is adapted to obtain spectral electrical impedance tomography recordings and electroencephalography recordings, simultaneously.

26. An arrangement, comprising:  
15 an electrical stimulator;  
a switch coupled to the electrical stimulator;  
a plurality of electrodes positioned on at least one portion of a subject, wherein each of the electrodes is coupled to the switch;  
an analog to digital (A/D) converter coupled to the switch and to each  
20 of the electrodes; and  
a computer system adapted to detect an abnormality or inconsistency within the subject by generating internal impedance data, the internal impedance data indicating an impedance change within the at least one portion of the subject, wherein the impedance change is associated with at least one of:  
25 a change in at least one characteristic of a blood vessel within the subject, and  
a presence of a foreign object within the at least one portion of the subject.

27. The arrangement of claim 26, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:

- 5                   a change in a fluid flow rate within the at least one portion of the subject, and  
                  a change in a fluid volume within the at least one portion of the subject.

28. The arrangement of claim 27, wherein the fluid includes blood.

29. The arrangement of claim 27, wherein at least a portion of the foreign  
10 object comprises a metal material.

30. The arrangement of claim 26, wherein the computer system generates a continuous, real time internal impedance map to detect the abnormality or inconsistency within the subject by generating, and wherein the impedance map indicates the impedance change within the subject.

15           31. The arrangement of claim 26, wherein the computer system generates a plurality of static internal impedance maps to detect the abnormality or inconsistency within the subject and wherein the impedance maps indicate the impedance change within the subject.

20           32. The arrangement of claim 26, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.

33. The arrangement of claim 26, wherein the at least one portion of the subject is a portion of a brain of the subject.

25           34. The arrangement of claim 26, wherein the at least one portion of the subject is a portion of a torso of the subject.

35. The arrangement of claim 26, wherein the electrical stimulator is a function generator.

36. The arrangement of claim 26, wherein the switch is a thirty-two channel matrix switch.

5 37. The arrangement of claim 26, wherein the A/D converter is a thirty-two channel, twenty-four bit A/D converter.

38. The arrangement of claim 37, wherein the computer system is adapted to obtain spectral electrical impedance tomography recordings and electroencephalography recordings, simultaneously.

10 39. The arrangement of claim 26, wherein the computer system further is coupled to the electrical stimulator.

40. An arrangement for use within a magnetic resonance imaging environment, comprising:

an electrical stimulator;

15 a switch coupled to the electrical stimulator via a filter;

a plurality of electrodes positioned on at least one portion of a subject, wherein each of the electrodes is coupled to the switch;

an analog to digital (A/D) converter coupled to the switch and to each of the electrodes; and

20 a computer system coupled to the switch and to the A/D converter, wherein the electrical stimulator applies a current to at least one pair of the electrodes, and the A/D converter measures voltage distribution and a current distribution resulting from the applied current, wherein the computer system is adapted to detect an abnormality or inconsistency within the subject by generating internal impedance

25 data, the internal impedance data indicating an impedance change within the at least one portion of the subject, and wherein the impedance change is associated with at least one of:

a change in at least one characteristic of a blood vessel within the subject, and

a presence of a foreign object within the at least one portion of the subject.

5           41.     The arrangement of claim 40, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:

a change in a fluid flow rate within the at least one portion of the subject, and

10           a change in a fluid volume within the at least one portion of the subject.

42.     The arrangement of claim 41, wherein the fluid includes blood.

43.     The arrangement of claim 41, wherein the at least one portion of the foreign object comprises a metal material.

15           44.     The arrangement of claim 40, wherein the computer system generates a continuous, real time internal impedance map to detect the abnormality or inconsistency within the subject by generating, and wherein the impedance map indicates the impedance change within the subject.

20           45.     The arrangement of claim 40, wherein the computer system generates a plurality of static internal impedance maps to detect the abnormality or inconsistency within the subject, and wherein the impedance maps indicate the impedance change within the subject.

25           46.     The arrangement of claim 40, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.

47. The arrangement of claim 40, wherein the at least one portion of the subject is a portion of a brain of the subject.

48. The arrangement of claim 40, wherein the at least one portion of the subject is a portion of a torso of the subject.

5 49. The arrangement of claim 40, wherein the electrical stimulator is a function generator.

50. The arrangement of claim 40, wherein the switch is a thirty-two channel matrix switch.

51. The arrangement of claim 40, wherein the A/D converter is a thirty-  
10 two channel, twenty-four bit A/D converter.

52. The arrangement of claim 51, wherein the computer system is adapted to obtain spectral electrical impedance tomography recordings and electroencephalography recordings, simultaneously.

53. The arrangement of claim 40, wherein the computer system is coupled  
15 to the electrical stimulator.

54. The arrangement of claim 40, wherein the computer system and the electrical stimulator are positioned externally from a magnetic resonance imaging room, and wherein the switch, the A/D converter and the electrodes are positioned inside of the magnetic resonance imaging room.

20 55. An arrangement, comprising:

means for applying a current to at least one pair of electrodes that are positioned on at least one portion of a subject;

means for measuring voltage distributions resulting from the applied current; and

25 a computer system adapted to detect an abnormality or inconsistency within the subject by generating internal impedance data, the internal impedance data

indicating an impedance change within the at least one portion of the subject, wherein the impedance change is associated with at least one of:

- a change in at least one characteristic of a blood vessel within the subject, and
- 5 a presence of a foreign object within the at least one portion of the subject.

56. The arrangement of claim 55, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:

- 10 a change in a fluid flow rate within the at least one portion of the subject, and
- a change in a fluid volume within the at least one portion of the subject.

57. The arrangement of claim 56, wherein the fluid includes blood.

- 15 58. The arrangement of claim 56, wherein the at least one portion of the foreign object comprises a metal material.

59. The arrangement of claim 55, wherein the computer system generates a continuous, real time internal impedance map to detect the abnormality or inconsistency within the subject by generating, and wherein the impedance map  
20 indicates the impedance change within the subject.

60. The arrangement of claim 55, wherein the computer system generates a plurality of static internal impedance maps to detect the abnormality or inconsistency within the subject, and wherein the impedance maps indicate the impedance change within the subject.

- 25 61. The arrangement of claim 55, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.



62. The arrangement of claim 55, wherein the at least one portion of the subject is a portion of a brain of the subject.

63. The arrangement of claim 55, wherein the at least one portion of the subject is a portion of a torso of the subject.

5 64. The arrangement of claim 55, wherein the means for applying the current comprises an electrical stimulator.

65. The arrangement of claim 64, wherein the electrical stimulator is a function generator.

66. The arrangement of claim 55, wherein the means for measuring the  
10 voltage distributions comprises an A/D converter.

67. The arrangement of claim 66, wherein the A/D converter is a thirty-two channel, twenty-four bit A/D converter.

68. The arrangement of claim 55, wherein the computer system is adapted to obtain spectral electrical impedance tomography recordings and  
15 electroencephalography recordings, simultaneously.

69. An abnormality or inconsistency detection arrangement, comprising:  
an analog to digital converter adapted to obtain spectral electrical impedance tomography recordings and current density recordings from a subject, simultaneously.

20 70. The arrangement of claim 69, further comprising:

a computer system adapted to detect at least one of the abnormality and the inconsistency within the subject by generating internal impedance data based on the spectral electrical impedance tomography recordings and the current density recordings, the internal impedance data indicating an impedance change within at  
25 least one portion of the subject; and

an electrical stimulator adapted to apply a current to at least one pair of electrodes positioned on the at least one portion of the subject.

71. A method of detecting an abnormality or an inconsistency, comprising the steps of:

generating internal impedance data indicating an impedance change within a subject, wherein the impedance change is associated with at least one of a  
5 change in at least one characteristic of a blood vessel within the subject and a presence of a foreign object within at least one portion of the subject; and

detecting the abnormality or inconsistency based on the internal impedance data.

72. The method of claim 71, further comprising the steps of:

10 applying a current to at least one pair of the electrodes which are positioned on the at least one portion of the subject; and  
measuring voltage distributions resulting from the applied current.

73. The method of claim 71, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:

15 a change in a fluid flow rate within the at least one portion of the subject, and  
a change in a fluid volume within the at least one portion of the subject.

74. The method of claim 73, wherein the fluid includes blood, and wherein  
20 the at least one portion of the foreign object comprises a metal material.

75. The method of claim 71, wherein the step of generating the internal impedance data comprises the step of generating a continuous, real time internal impedance map indicating an impedance change within the subject.

76. The method of claim 71, wherein the step of generating the internal  
25 impedance data comprises the step of generating a plurality of static internal impedance maps that indicate the impedance change within the subject.

77. The method of claim 71, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.

5 78. The method of claim 71, wherein the at least one portion of the subject is one of a portion of a brain of the subject and a portion of a torso of the subject.

79. The method of claim 71, further comprising the step of simultaneously obtaining spectral electrical impedance tomography recordings and electroencephalography recordings from the subject.

10 80. A method of detecting an abnormality or an inconsistency, comprising the steps of:

positioning a plurality of electrodes on at least one portion of a subject;  
applying a current to at least one pair of the electrodes;  
measuring voltage distributions resulting from the applied current; and  
15 detecting the abnormality or inconsistency within the subject by generating internal impedance data which indicates an impedance change within the at least one portion of the subject, wherein the impedance change is associated with at least one of:

20 a change in at least one characteristic of a blood vessel within the subject, and  
a presence of a foreign object within the at least one portion of the subject.

81. The method of claim 80, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:  
25 a change in a fluid flow rate within the at least one portion of the subject, and  
a change in a fluid volume within the at least one portion of the subject.

82. The method of claim 80, wherein the internal impedance data is generated using a continuous, real time internal impedance map that indicates that an impedance change within the subject has occurred.

83. The method of claim 80, wherein the internal impedance data is  
5 generated using a plurality of static internal impedance maps that indicate the impedance change within the subject.

84. The method of claim 80, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over  
10 a predetermined range of frequencies.

85. The method of claim 80, further comprising the step of simultaneously obtaining spectral electrical impedance tomography recordings and electroencephalography recordings from the subject.

86. A method of detecting an abnormality or inconsistency within a  
15 magnetic resonance imaging environment, comprising the steps of:

positioning a plurality of electrodes on at least one portion of a subject;  
applying a current to at least one pair of the electrodes;  
filtering the current before the current is transmitted inside the magnetic resonance imaging environment;  
20 measuring voltage distributions resulting from the applied current; and  
detecting an abnormality within the subject by generating internal impedance data that indicates an impedance change within the at least one portion of the subject, wherein the impedance change is associated with at least one of:  
a change in at least one characteristic of a blood vessel within  
25 the subject, and  
a presence of a foreign object within the at least one portion of the subject.

87. The method of claim 86, wherein the impedance change associated with the change in the at least one characteristic of the blood vessel is at least one of:

a change in a fluid flow rate within the at least one portion of the subject, and  
a change in a fluid volume within the at least one portion of the subject.

5           88.     The method of claim 86, wherein the internal impedance data is generated using a continuous, real time internal impedance map that indicates the impedance change within the subject.

          89.     The method of claim 86, wherein the internal impedance data is generated using a plurality of static internal impedance maps that indicate the  
10          impedance change within the subject.

          90.     The method of claim 86, wherein the subject is a human being, and wherein the computer system is further adapted to detect the abnormality or the inconsistency within the human being by generating the internal impedance data over a predetermined range of frequencies.

15          91.     A method of detecting an abnormality or inconsistency, comprising the step of:

                    simultaneously obtaining spectral electrical impedance tomography recordings and electroencephalography recordings from a subject; and

                    detecting the abnormality or inconsistency using the simultaneously  
20          obtained spectral electrical impedance tomography recordings and electroencephalography recordings.

          92.     An arrangement, comprising:

                    a computer system adapted to detect an abnormality or an inconsistency within a subject by generating internal impedance data over a  
25          predetermined range of frequencies, the internal impedance data indicating an impedance change within at least one portion of the subject.

          93.     The arrangement of claim 92, wherein the computer system is further adapted to generate data associated with a flow of current through the at least one portion of the subject and to modify the data associated with the flow of current

through the at least one portion of the subject based on at least one predetermined characteristic of the subject.

94. The arrangement of claim 93, wherein the at least one predetermined characteristic is at least one of an age of the subject, a sex of the subject, and a height  
5 of the subject.

95. The arrangement of claim 93, wherein the impedance change is associated with at least one of a change in at least one characteristic of a blood vessel within the subject and a presence of a foreign object within the at least one portion of the subject.

10 96. A method of detecting an abnormality or an inconsistency, comprising the step of generating internal impedance data over a predetermined range of frequencies, the internal impedance data indicating an impedance change within at least one portion of the subject.

97. The method of claim 96, wherein the step of generating the internal  
15 impedance data comprises the substeps of:

generating data associated with a flow of current through the at least one portion of the subject; and

modifying the data associated with the flow of current through the at least one portion of the subject based on at least one predetermined characteristic of  
20 the subject.

98. The arrangement of claim 97, wherein the at least one predetermined characteristic is at least one of an age of the subject, a sex of the subject, and a height of the subject.

99. The arrangement of claim 97, wherein the impedance change is  
25 associated with at least one of a change in at least one characteristic of a blood vessel within the subject and a presence of a foreign object within the at least one portion of the subject.

FIG. 1

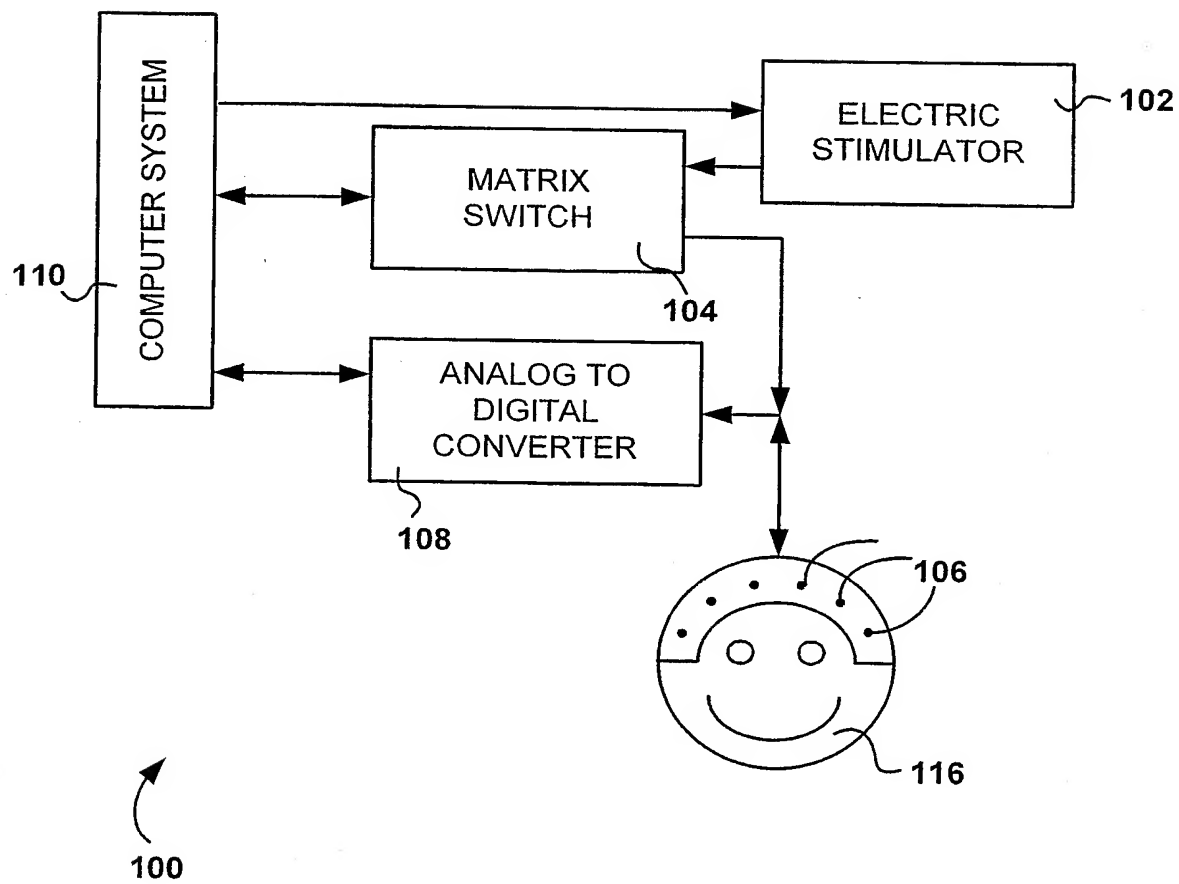


FIG. 2

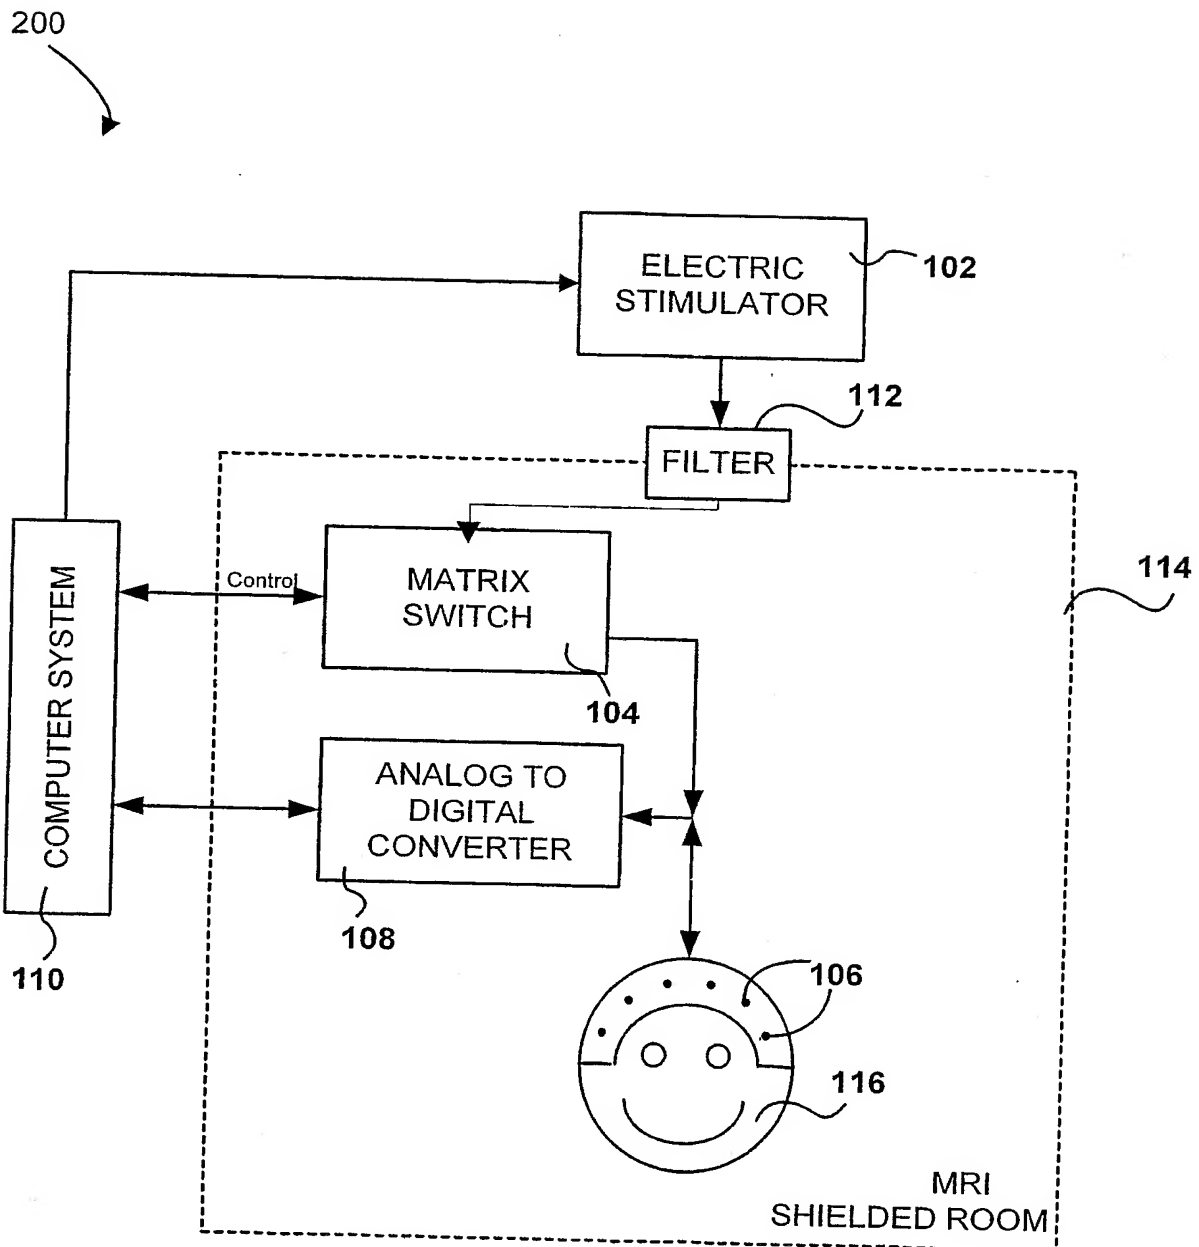




FIG. 3A

300

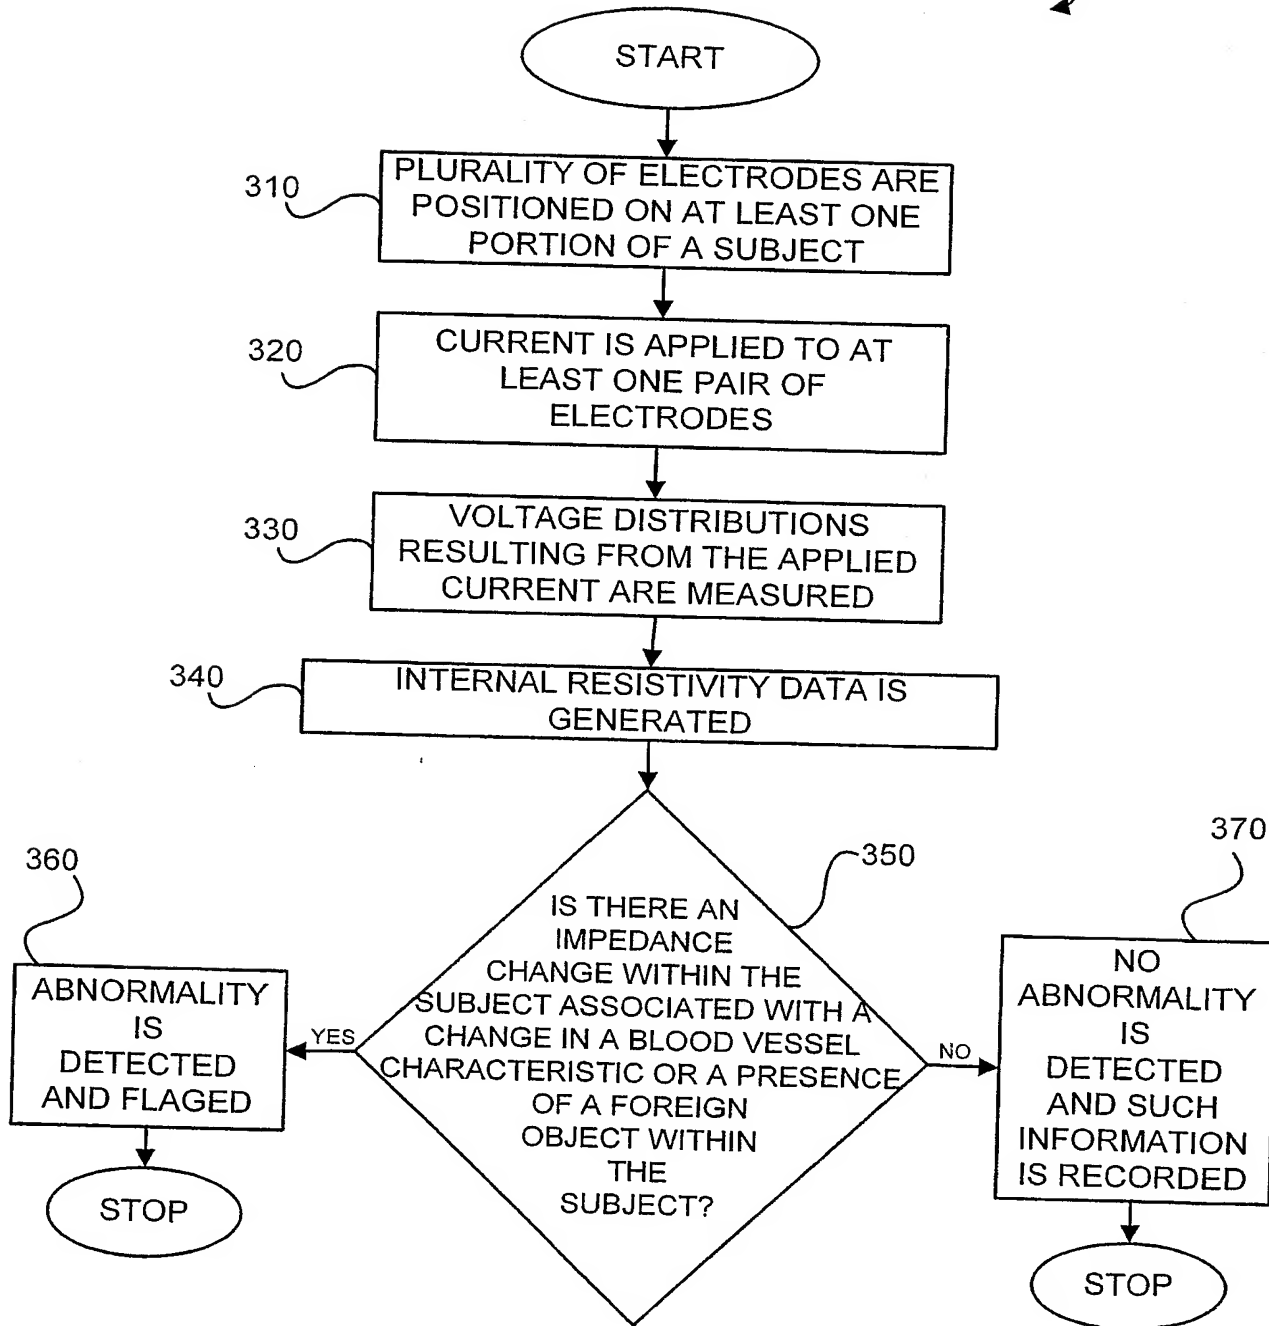


FIG. 3B

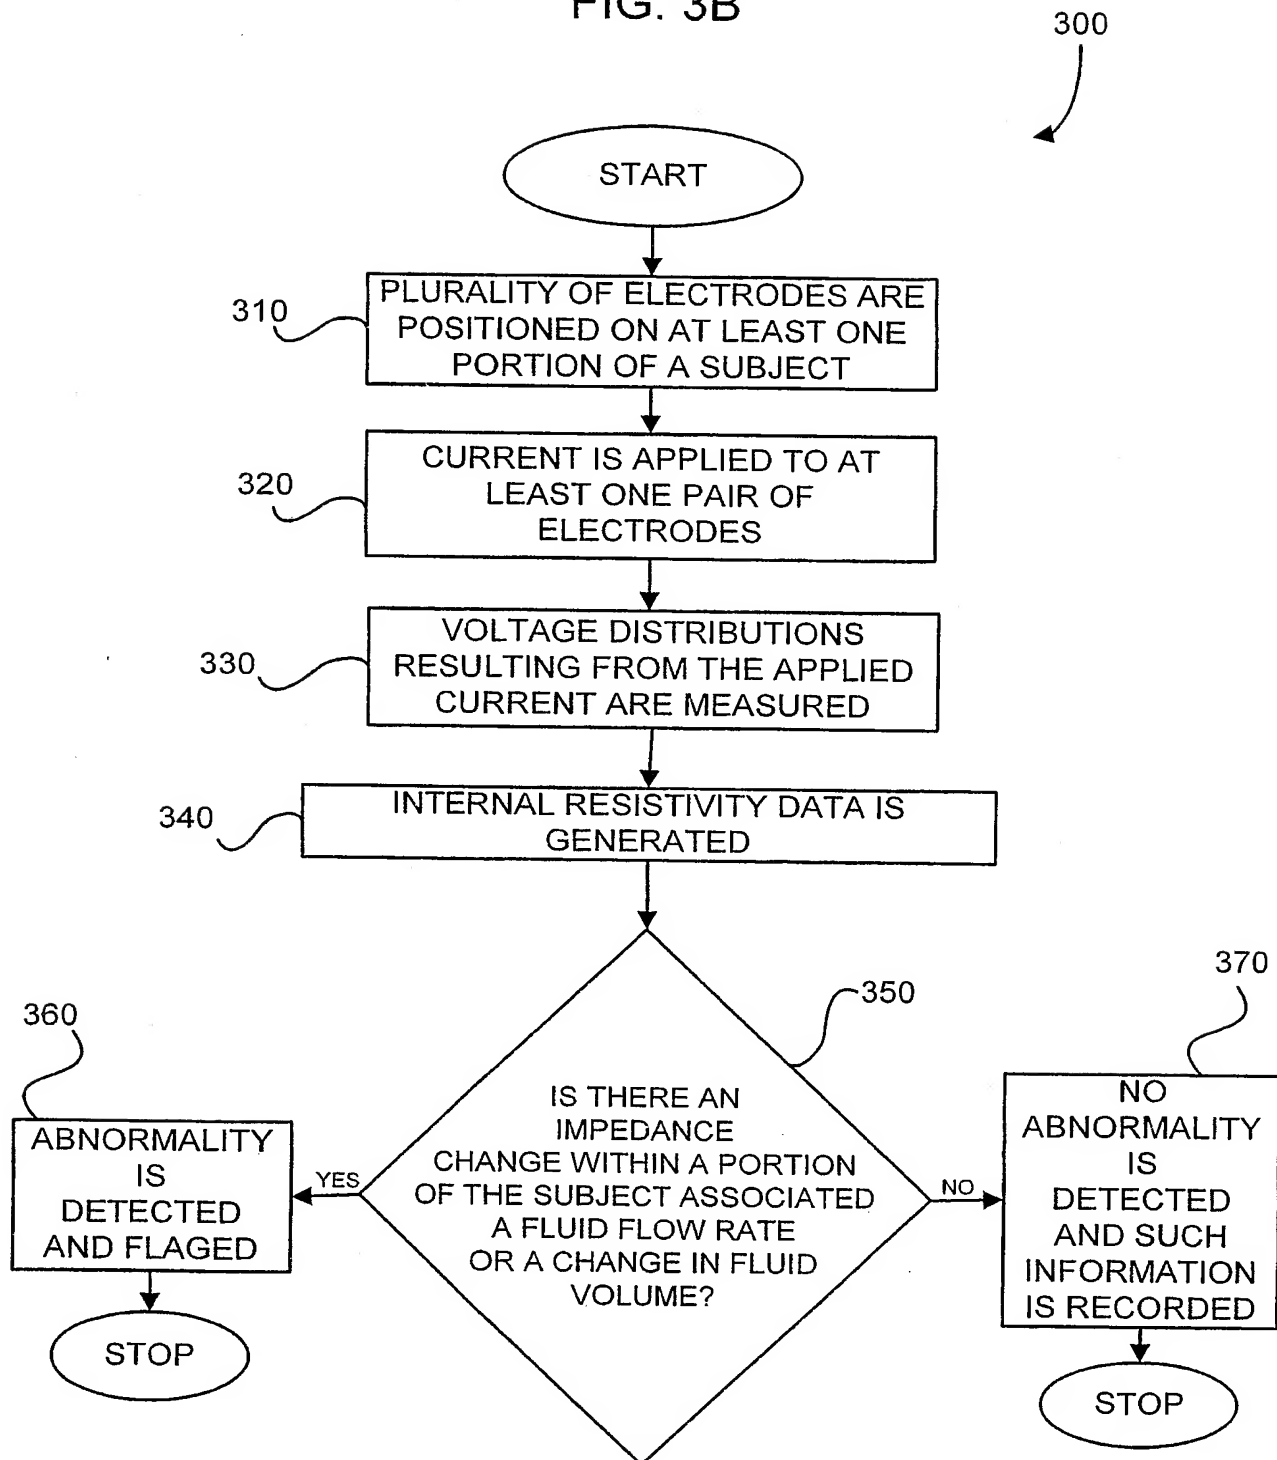
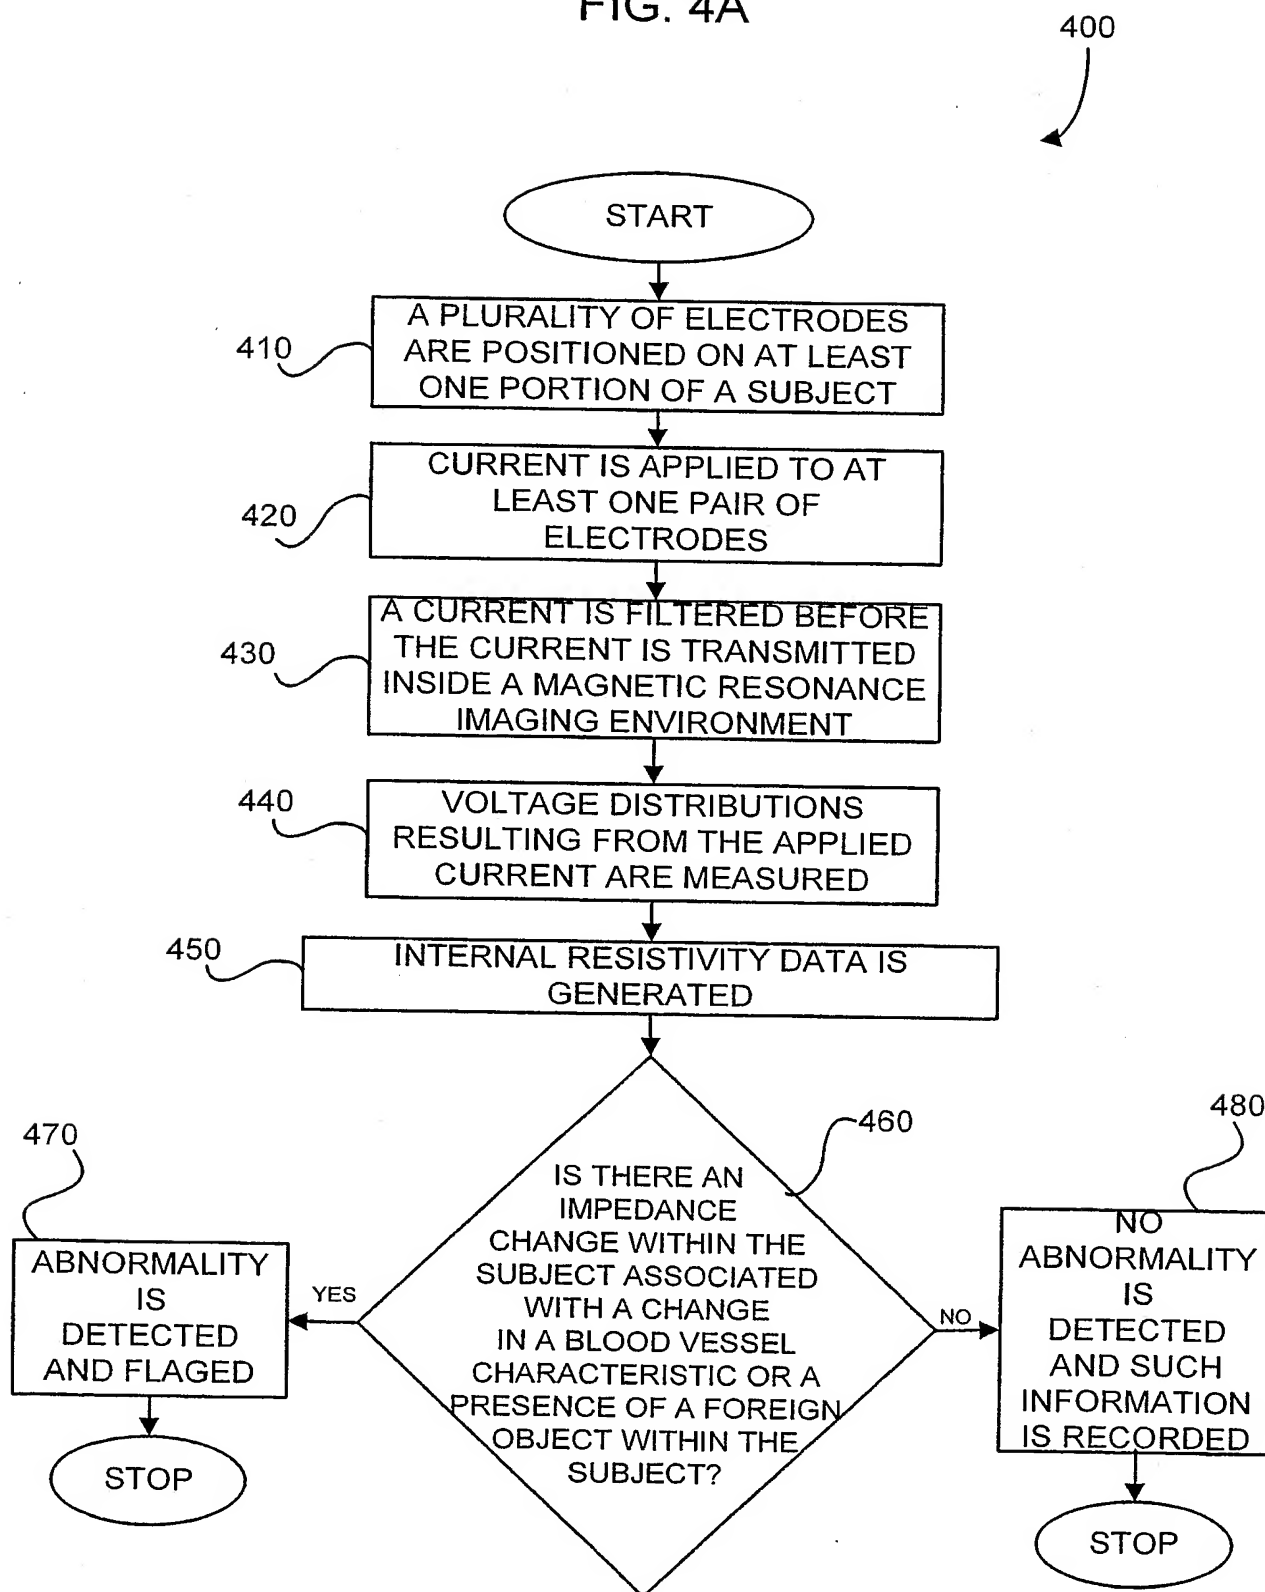


FIG. 4A




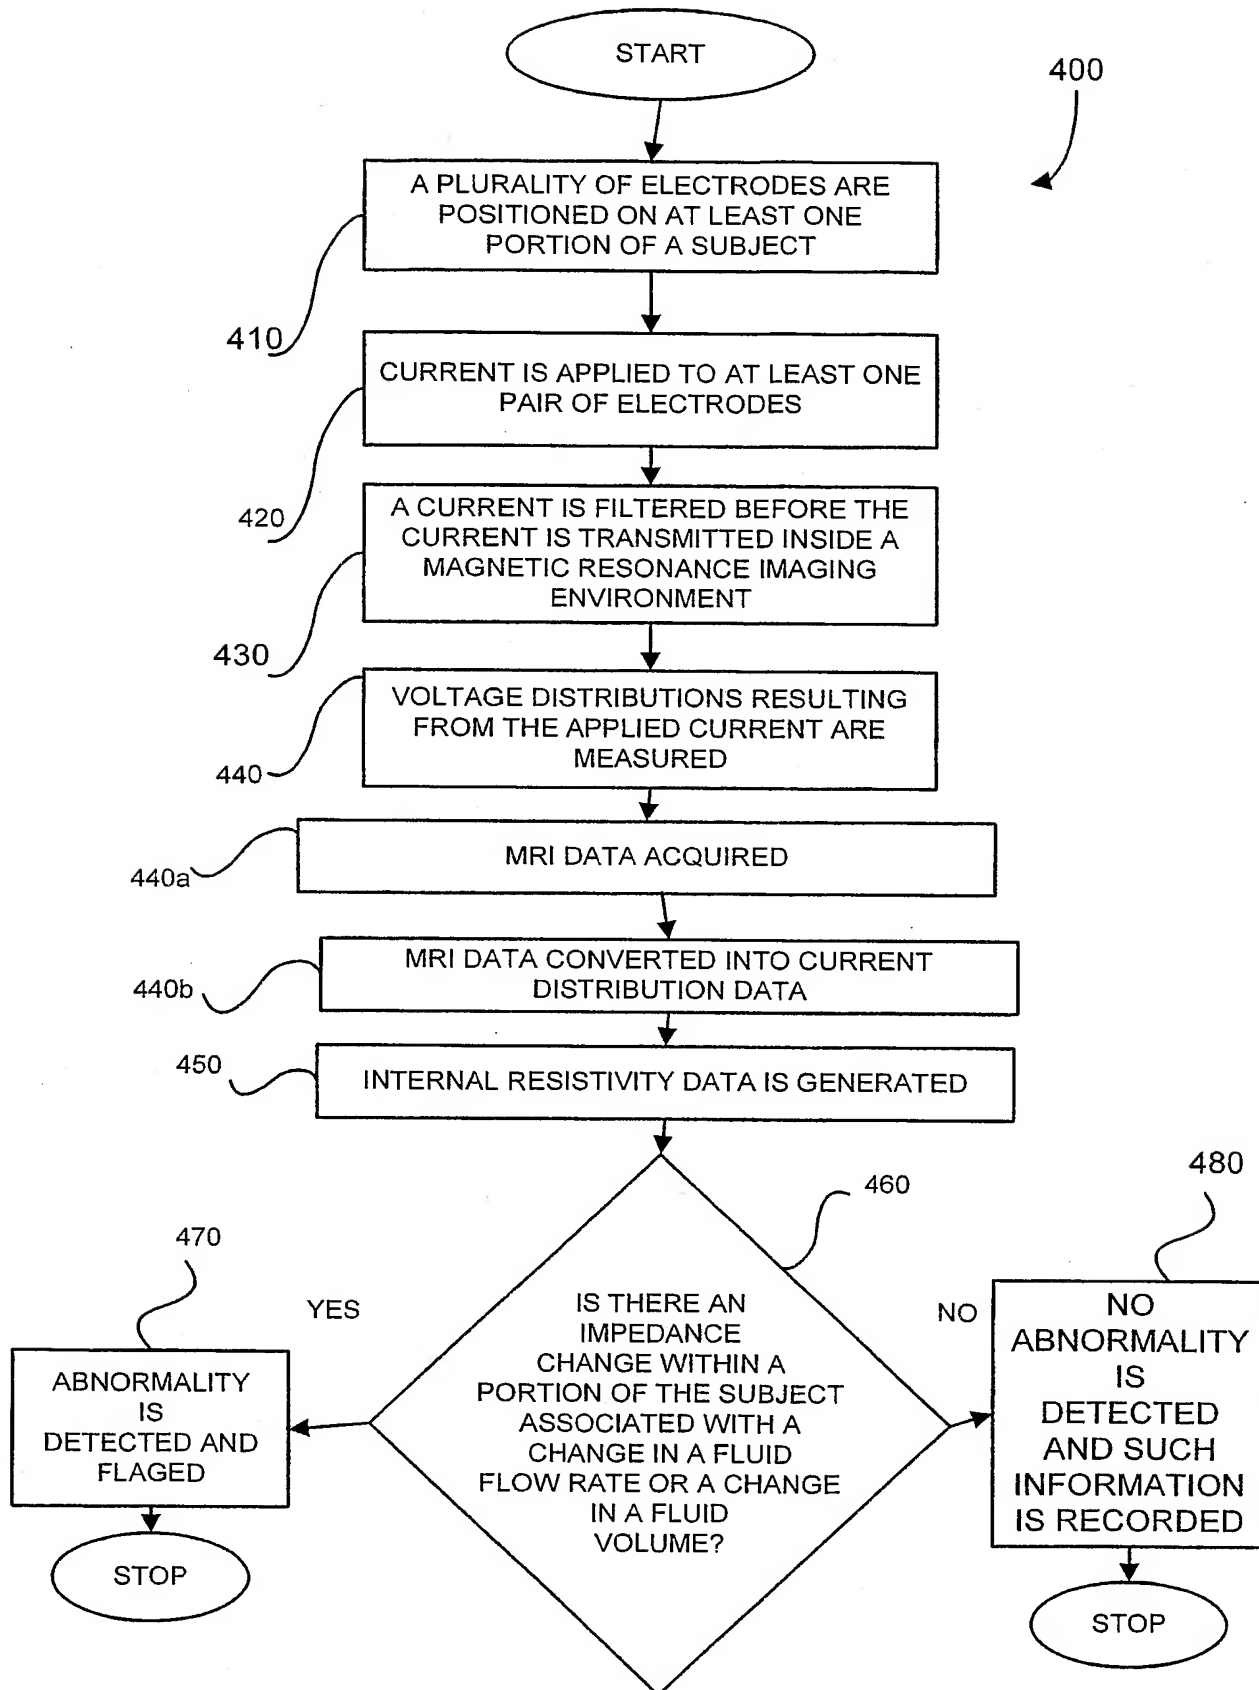


FIG. 4C





(19) World Intellectual Property  
Organization  
International Bureau

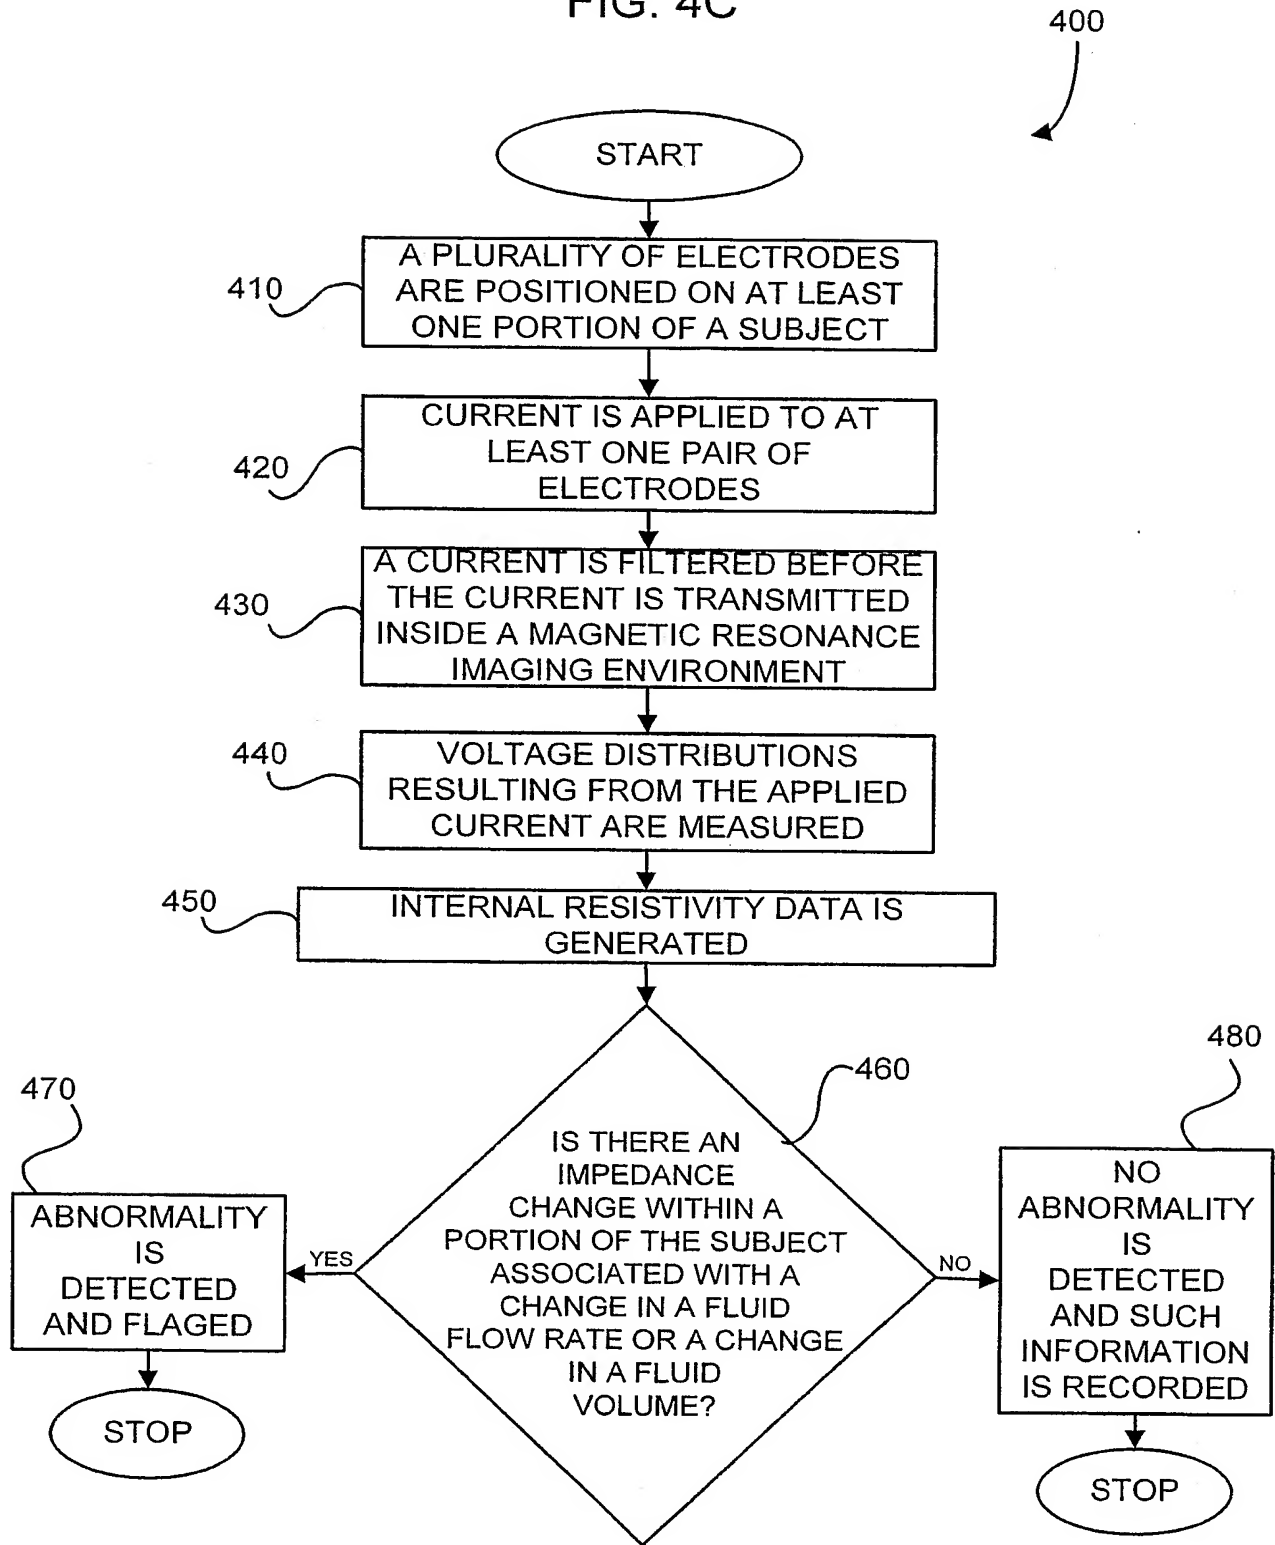

(43) International Publication Date  
29 April 2004 (29.04.2004)


PCT

(10) International Publication Number  
**WO 2004/036379 A3**

- (51) International Patent Classification<sup>7</sup>: **A61B 5/02**, 5/05, 5/04
- (21) International Application Number: PCT/US2003/033009
- (22) International Filing Date: 17 October 2003 (17.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/419,256 17 October 2002 (17.10.2002) US
- (71) Applicant (for all designated States except US): **THE GENERAL HOSPITAL CORPORATION** [US/US]; 55 Fruit Street, Boston, MA 02114 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BONMASSAR, Giorgio** [IT/US]; 16 Taft Avenue, Lexington, MA 02421 (US). **BELLIVEAU, John, W.** [US/US]; 85 East India Row 24C, Boston, MA 02119 (US).
- (54) Agent: **ABELEV, Gary**; Baker Botts L.L.P., 30 Rockefeller Plaza, New York, NY 10112-4498 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: ARRANGEMENT AND METHOD FOR DETECTING ABNORMALITIES AND INCONSISTENCIES IN A BODY

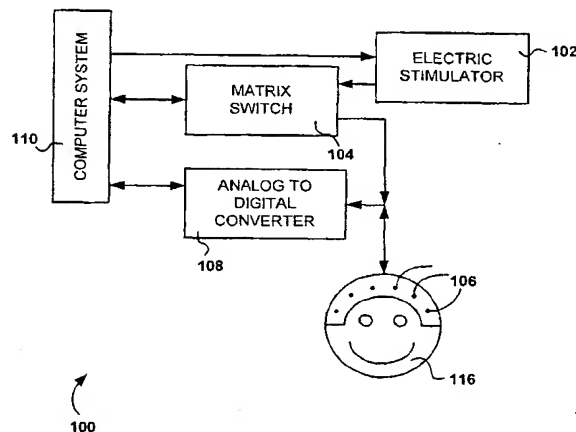

(57) Abstract: A system for detecting abnormalities or inconsistencies and a method to utilize the same are provided. In particular, a computer system (110) may be adapted to detect the abnormality or inconsistency within at least a portion of a subject by generating internal impedance data which indicates that an impedance change within the portion of the subject has occurred. For example, the impedance change may be associated with a change in at least one characteristic of a blood vessel within the subject (such as a change in a fluid flow rate within at least a portion of the subject), a change in a fluid volume within at least a portion of the subject, etc. The impedance change also may be associated with the presence of a foreign object within the portion of the subject. In an exemplary embodiment, it is possible to detect the abnormality or inconsistency within the subject by generating a continuous, real time internal impedance map indicating the impedance change within the subject. Alternatively, the abnormality or inconsistency may be detected within the subject by generating a plurality of static internal impedance maps which indicate that the impedance change within the subject has occurred.

WO 2004/036379 A3





(88) Date of publication of the international search report:

1 July 2004

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/33009

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : A61B 5/02, 5/05, 5/04

US CL : 600/506, 547, 544

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 600/506, 547, 544, 300, 507, 545

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EAST**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6,201,990 B1 (WEXLER et al) 13 March 2001 (13.03.2001), abstract.	1, 14, 26, 40, 55, 69, and 92
A	US 5,309,917 A (WANG) 10 May 1994 (10.05.1994), abstract.	1, 14, 26, 40, 55, 69, and 92

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

08 April 2004 (08.04.2004)

Date of mailing of the international search report

06 MAY 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Navin Natmihadha

Telephone No. (703) 308-1148

